

# submittal

Job \_\_\_\_\_  
 Location \_\_\_\_\_  
 Submitted to \_\_\_\_\_  
 Submittal Prepared by \_\_\_\_\_  
 Approve Date \_\_\_\_\_  
 Date \_\_\_\_\_

## 05 series Type A

S  
C  
E  
P  
S

UL Classified - **3 Hour Rating**, Static  
 For use in installations rated  
 3 hours or greater

Standard profile (4¼") 22Ga.  
 1 piece rollformed frame



Type A Damper,  
 Blades in air-stream

Available for vertical installation **ONLY**

Standard fusible link - 165°  
 (or w/optional 212°)

Available in stainless steel

Available in single-section sizes  
 from 4" x 4" to 60" x 60",  
 multi-section sizes to 120" x 120"

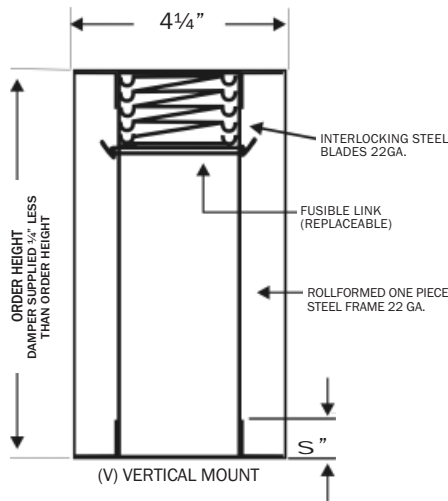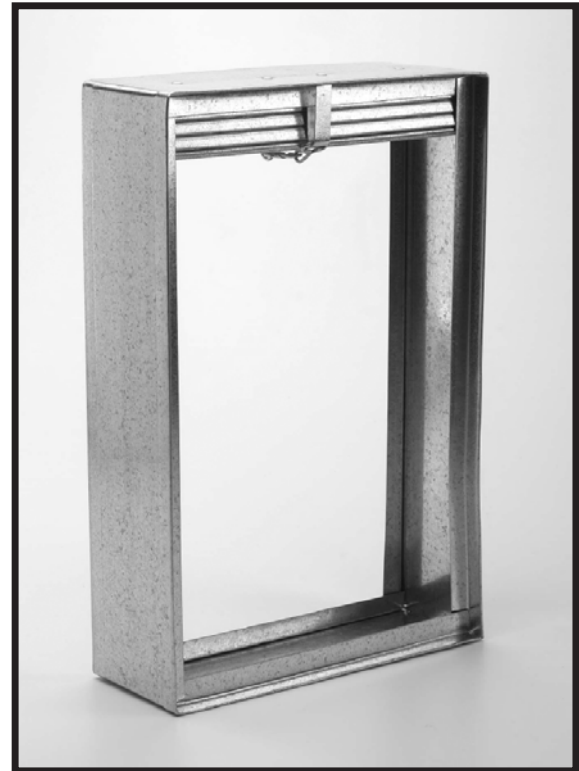

This product meets the requirements for fire dampers established by:

**UL Standard 555**  
**NFPA Standard 90A**  
**ICC Building Codes**

Qty.	Mount (V) vertical (H) horiz.	Damper Size		Fusible Link Temp (165° F) std.	Factory Sleeve Option				
		W	H		Dimensions		Gauge	Material	
					L	K			