
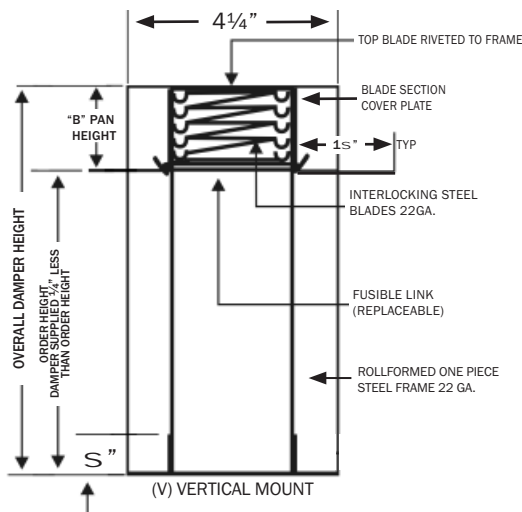


submittal

Job _____
 Location _____
 Submitted to _____
 Submittal Prepared by _____
 Approve Date _____
 Date _____

05 series Type B

- S UL Classified - **3 Hour Rating**, Static
- S For use in installations rated 3 hours or greater
- C Standard profile (4¼") 22Ga.
- C 1 piece rollformed frame
- E Type B Damper,
- E Blades out of air-stream
- P Available for vertical installation **ONLY**
- P Standard fusible link - 165° (or w/optional 212°)
- S Available in stainless steel
- S Available in single-section sizes from 4" x 3" to 60" x 53", multi-section sizes to 120" x 53"

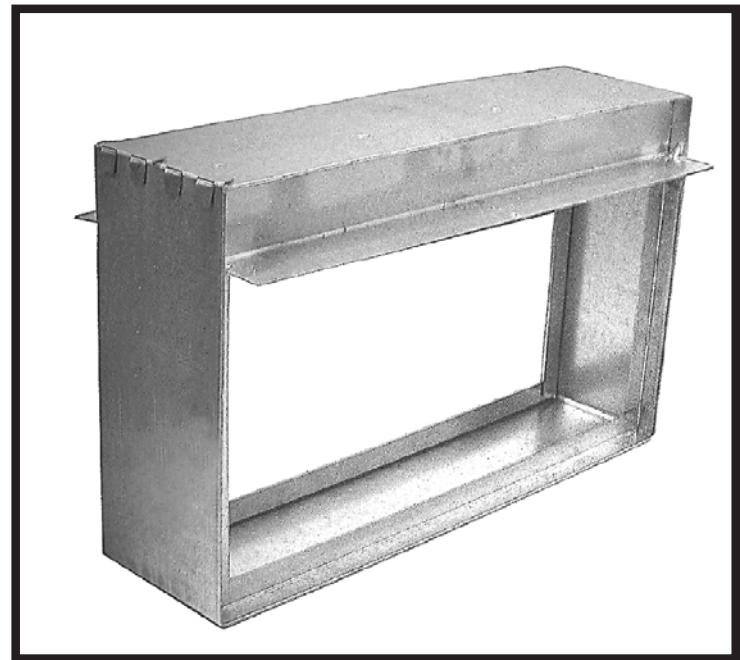

This product meets the requirements for fire dampers established by:

UL Standard 555
NFPA Standard 90A
ICC Building Codes

Qty.	Mount (V) vertical (H) horiz.	Damper Size		Fusible Link Temp (165° F) std.	Factory Sleeve Option				
		W	H		Dimensions		Gauge	Material	
					L	K			