



# submittal

Job \_\_\_\_\_  
 Location \_\_\_\_\_  
 Submitted to \_\_\_\_\_  
 Submittal Prepared by \_\_\_\_\_  
 Approve Date \_\_\_\_\_  
 Date \_\_\_\_\_

## 05 series Type C

- S UL Classified - **3 Hour Rating**, Static  
 For use in installations rated 3 hours or greater
- S Standard profile (4 1/4") 22Ga.  
 1 piece rollformed frame
- C Type C Damper, blades and  
 frame out of air-stream, 100% free area
- E Available for vertical installation **ONLY**  
 Available w/round, oval or rectangular collar
- D Standard fusible link - 165°  
 (or w/optional 212°)
- S Available in stainless steel
- S Available in single-section sizes to 60" x 60"; duct  
 sizes from 4"Ø to 52"Ø and oval, rectangular  
 collars from 4" x 4" to 58" x 52"

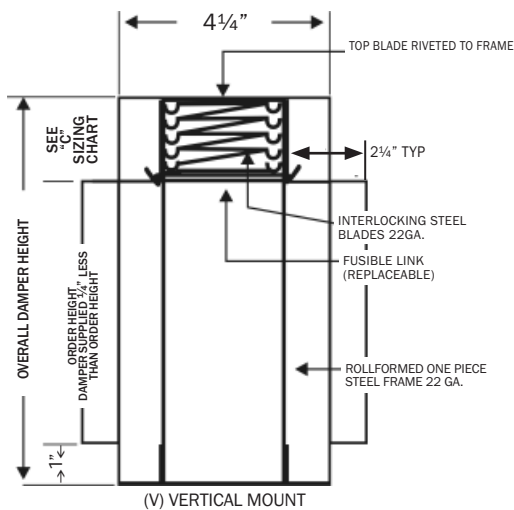

This product meets the requirements for fire dampers established by:

**UL Standard 555**  
**NFPA Standard 90A**  
**ICC Building Codes**

Qty.	Mount (V) vertical (H) horiz.	Damper Size		Fusible Link Temp (165° F) std.	Factory Sleeve Option				
		W	H		Dimensions		Gauge		Material
					L	K			