


TECHNICAL DATA SHEET



FOR PRICING AND AVAILABILITY - CONTACT
ALLSTATE INSULATION
 516-932-9170 888-881-4822 516-932-9171(FAX)
 allstateinsulation@yahoo.com

7.2" Rib Roofing and Siding

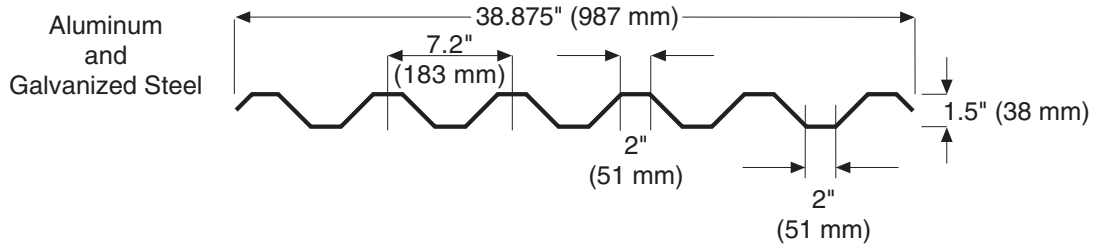

Profile Dimensions

	Overall Width	Coverage Width	Rib Pitch	Profile Depth
Aluminum	38.875"	36"	7.2"	1.5"
Steel	38.875"	36"	7.2"	1.5"

Load Span Table

7.2" RIB	NO. SPANS	LOAD (PSF)									
		20	25	30	35	40	45	50	55	60	
Siding Allowable Span											
.024" Aluminum	1	6'-7"	5'-11"	5'-5"	5'-0"	4'-8"	4'-5"	4'-2"	4'-0"	3'-10"	
	2	6'-7"	5'-11"	5'-5"	5'-0"	4'-8"	4'-5"	4'-2"	4'-0"	3'-10"	
.032" Aluminum	1	8'-6"	7'-7"	7'-0"	6'-5"	6'-0"	5'-8"	5'-5"	5'-1"	4'-11"	
	2	8'-6"	7'-7"	7'-0"	6'-5"	6'-0"	5'-8"	5'-5"	5'-1"	4'-11"	
.040" Aluminum	1	9'-6"	8'-10"	8'-4"	7'-7"	7'-1"	6'-8"	6'-5"	6'-1"	5'-10"	
	2	10'-1"	9'-0"	8'-4"	7'-7"	7'-1"	6'-8"	6'-5"	6'-1"	5'-10"	
.050" Aluminum	1	10'-4"	9'-7"	9'-0"	8'-7"	8'-2"	7'-11"	7'-7"	7'-4"	7'-0"	
	2	12'-1"	10'-10"	9'-11"	9'-2"	8'-7"	8'-1"	7'-8"	7'-4"	7'-0"	
24 GA. Steel	1	7'-9"	7'-3"	6'-9"	6'-6"	6'-2"	5'-10"	5'-9"	5'-7"	5'-4"	
	2	9'-9"	8'-9"	8'-0"	7'-4"	6'-10"	6'-6"	6'-1"	5'-10"	5'-7"	
22 GA. Steel	1	8'-6"	7'-11"	7'-6"	7'-1"	6'-9"	6'-6"	6'-3"	6'-1"	5'-11"	
	2	11'-6"	10'-3"	9'-3"	8'-7"	8'-0"	7'-7"	7'-3"	6'-10"	6'-7"	
20 GA. Steel	1	9'-3"	8'-6"	8'-0"	7'-8"	7'-4"	7'-0"	6'-9"	6'-7"	6'-4"	
	2	12'-3"	11'-6"	10'-6"	9'-9"	9'-3"	8'-8"	8'-3"	7'-10"	7'-6"	
18 GA. Steel	1	10'-1"	9'-4"	8'-9"	8'-4"	8'-0"	7'-8"	7'-5"	7'-2"	7'-0"	
	2	13'-6"	12'-6"	11'-10"	11'-2"	10'-8"	10'-4"	9'-11"	9'-7"	9'-5"	
Roofing Allowable Span											
.032" Aluminum	2	7'-5"	6'-7"	6'-0"	5'-7"	5'-2"	4'-11"	4'-8"	4'-6"	4'-4"	
.040" Aluminum	2	8'-10"	7'-10"	7'-1"	6'-7"	6'-2"	5'-10"	5'-6"	5'-4"	5'-1"	
.050" Aluminum	2	10'-6"	9'-5"	8'-7"	7'-11"	7'-5"	7'-0"	6'-7"	6'-4"	6'-1"	
24 GA. Steel	2	8'-6"	7'-6"	6'-10"	6'-4"	6'-0"	5'-7"	5'-3"	5'-1"	4'-10"	
22 GA. Steel	2	10'-0"	8'-9"	8'-0"	7'-6"	7'-0"	6'-7"	6'-3"	6'-0"	5'-9"	
20 GA. Steel	2	11'-3"	10'-0"	9'-3"	8'-6"	8'-0"	7'-6"	7'-1"	6'-9"	6'-6"	
18 GA. Steel	2	13'-6"	12'-6"	11'-6"	10'-7"	9'-11"	9'-4"	8'-11"	8'-6"	8'-1"	

NOTES:

1. Allowable deflection for aluminum is L/60.
2. Allowable deflection for steel is L/180.
3. Allowable spans for roofing are based on live load.

TECHNICAL DATA SHEET

7.2" Rib Roofing and Siding



Material Specifications

Aluminum

Alloy 3004 in compliance with the Aluminum Association Composition Specifications and conforming to ASTM B209-96 is standard. Alloy 3004 Alclad (Alloy 7072 cladding is used) is also available. Available smooth or stucco embossed.

Steel

Grade 33 structural quality conforming to ASTM A653, galvanized to ASTM A924, G90 Class is standard. Available smooth or stucco embossed.

Engineering Properties

Aluminum	I ± (in ⁴ /ft)	S ± (in ³ /ft)	Lbs/Sq Painted	Steel	I ± (in ⁴ /ft)	S ± (in ³ /ft)	Lbs/Sq Painted
.032"	0.1555	0.2083	49.5	24 ga	0.1084	0.1071	111.8
.040"	0.1920	0.2560	62.2	22 ga	0.1423	0.1475	138.2
.050"	0.2445	0.3237	77.3	20 ga	0.1792	0.1911	164.1
				18 ga	0.2334	0.2961	224.5

Tolerances

- Standard Lengths: 5'0" to 40'0"
Length Tolerance: +1/2" - 0
- Overall Width: ± 1/4"
- Coverage Width: ± 5/32"
- Squareness:


<u>Length</u>	<u>Squareness Tolerance</u>
0" - 20'0"	3/16"
20'1" - 26'8"	5/16"
26'9" - 40'0"	3/8"

Installation & Fastening Guidelines

- Minimum recommended roof slope: 2:12
- Minimum end laps:
 - Siding: 4"
 - Roofing 3:12 or greater slope: 6"
 - Roofing 2:12 to 3:12 slope: 9"
(requires sealant at side and end laps)
- Fastening Patterns for 20psf loading*:

Panel field:	7.2" o. c.
Panel end laps:	7.2" o. c.
Panel sidelaps:	16" o. c.

It is recommended that when 7.2" Rib is used in a roofing application, attachment screw fasteners should be applied in the rib crowns.

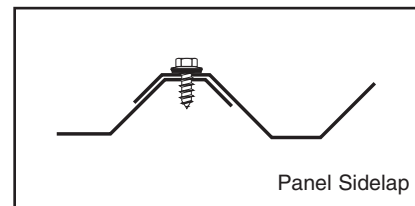

* Consult Alcoa for attachment guidelines for greater load conditions.

NOTE: This publication supersedes all prior editions and is based on the latest data available at time of printing. Due to product changes, improvements and other factors, Alcoa reserves the right to change or withdraw information contained herein without prior notice. Suitability of use or manner of use of any product contained herein or any possible patent infringement is the sole responsibility of the user.